
S4726E/S4732E ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lifts
- Compact & robust
- Roll-out extension decks for extra reach
- Suitable for indoor and outdoor use
- Ideal for construction & maintenance applications

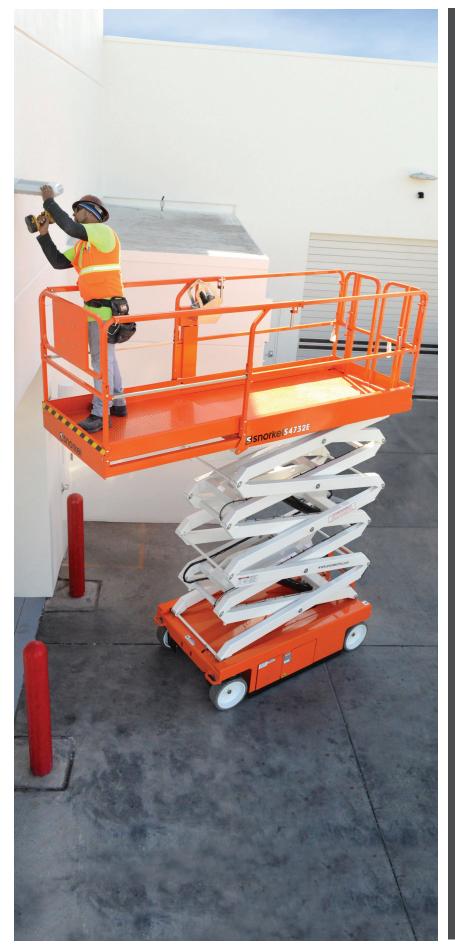

ELECTRIC SLAB SCISSOR LIFTS

S4726E/S4732E


DIMENSIONS	\$4726E	\$4732E
Max. working height	9.8m	11.8m
Max. platform height (A)	7.8m	9.8m
Platform size (stowed)	1.09m x 2.14m	1.09m x 2.14m
Platform size (extended)	1.09m x 3.36m	1.09m x 3.36m
Extension deck length (B)	1.21m	1.21m
Overall length (with step) (D)	2.3m	2.3m
Overall length (without step)	2.26m	2.26m
Overall width (C)	1.19m	1.19m
Stowed height (E)	2.3m	2.39m
Min. height (guardrails folded)	1.85m	1.94m
Ground clearance (stowed)	66mm	66mm
Ground clearance (elevated)	19mm	19mm


PERFORMANCE

Platform capacity	454kg	350kg	
Max. drive height	7.8m	9.8m	
Max. wind speed	12.5m/s	12.5m/s	
Max. drive speed (stowed)	3.2km/h	3.2km/h	
Max. drive speed (elevated)	0.6km/h	0.6km/h	
Raise/lower time	50/58 sec	50/58 sec	
Gradeability	25%	25%	
Inside turning radius	0.25m	0.25m	
Outside turning radius	2.41m	2.41m	
Tyres	15 x 5 non-marking rubber		
Controls	proportional		
Drive system	2 wheel drive		

POWER				
Power source	24V DC batter	24V DC battery electric		
Charger	90-240V, 2	90-240V, 25amp		
WEIGHT				
Weight	2,250kg	2,693kg		

TURNING RADIUS





STANDARD FEATURES

- Roll-out deck extension with dual locks
- Non-marking tyres
- Loading control pendant
- Swing-out service trays
- Saloon-door style entry gates
- Descent alarm
- All motion alarm
- 2 persons indoor
- 1 person outdoor
- Proportional controls, including descent
- Power line to platform
- Hour meter & onboard diagnostics display
- Integrated battery charger
- Battery condition indicator
- Crane & forklift points
- Dual lanyard attachments points
- Flashing amber light
- Scissor stack roller slide plates (set of 2)
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Snorkel Guard[™] secondary guarding system
- Airline to platform
- Aircraft bumpguard package
- Panel carrier
- Environmental hydraulic oil
- Inverter
- Pipe rack
- Top rail



Vigo Centre, Birtley Road, Washington, Tyne & Wear, NE38 9DA, U.K.

t: +44 (0) 845 1550 057 e: sales.emea@snorkellifts.com

CE Specification Subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.