


Specifications

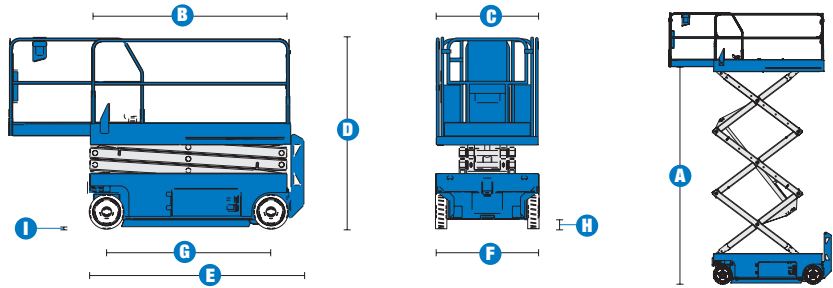

MODELS	GS™-2046		GS™-2646		GS™-3246	
MEASUREMENTS	US	Metric	US	Metric	US	Metric
Working height max*	26 ft	8.10 m	32 ft	9.92 m	38 ft	11.75 m
A Platform height max	20 ft	6.10 m	26 ft	7.92 m	32 ft	9.75 m
B Platform length - outside	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m
extended	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m
C Platform width - outside	3 ft 9.3 in	1.15 m	3 ft 9.3 in	1.15 m	3 ft 9.3 in	1.15 m
Guardrail height			3 ft 7 in	1.09 m	3 ft 7 in	1.09 m
Roll-out platform extension	3 ft	.91 m	3 ft	.91 m	3 ft	.91 m
Toeboard height	6 in	.15 m	6 in	.15 m	6 in	.15 m
Height - stowed: platform	3 ft 4.8 in	1.04 m	3 ft 9.6 in	1.16 m	4 ft 2.5 in	1.28 m
D folding guardrails	7 ft	2.13 m	7 ft 5 in	2.26 m	7 ft 10 in	2.39 m
rails folded	5 ft 1 in	1.55 m	5 ft 6 in	1.68 m	5 ft 11 in	1.80 m
E Length - stowed	7 ft 11 in	2.41 m	7 ft 11 in	2.41 m	7 ft 11 in	2.41 m
extended	10 ft 10.5 in	3.31 m	10 ft 10.5 in	3.31 m	10 ft 10.5 in	3.31 m
F Width	3 ft 10	1.17 m	3 ft 10	1.17 m	3 ft 10	1.17 m
G Wheelbase	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m
H Ground clearance - center	4 in	.10 m	4 in	.10 m	4 in	.10 m
I - with pothole guards deployed	.75 in	.019 m	.75 in	.019 m	.75 in	.019 m

PRODUCTIVITY						
Lift capacity	1,200 lbs	544 kg	1,000 lbs	454 kg	700 lbs	318 kg
Lift capacity - extension deck	250 lbs	113 kg	250 lbs	113 kg	250 lbs	113 kg
Drive speed - stowed	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability**	30%		30%		25%	
Turning radius - inside	zero	zero	zero	zero	zero	zero
Turning radius - outside	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m
Raise / lower speed	30 / 28 sec	30 / 28 sec	30 / 24 sec	30 / 24 sec	57 / 40 sec	57 / 40 sec
Controls	proportional		proportional		proportional	
Drive	dual front wheel		dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel		dual rear wheel	
Tires - solid non-marking	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm

POWER						
Power source	24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)	
Hydraulic system capacity	6.5 gal	24.6 L	6.5 gal	24.6 L	7.0 gal	26.5 L

WEIGHT***						
ANSI/CSA	3,977 lbs	1,804 kg	4,312 lbs	1,956 kg	5,211 lbs	2,364 kg
CE/AUS	4,351 lbs	1,974 kg	5,395 lbs	2,447 kg	6,200 lbs	2,812 kg

STANDARDS COMPLIANCE ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 *** Weight will vary depending on options and/or country standards.

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM

- Steel 7 ft 5 in (2.26 m) (standard)
- Extension platform 3 ft (.91 m)

POWER

- 24 V (four 6 V 225 Ah batteries)

DRIVE

- 2WD

TIRE

- Solid non-marking tires

STANDARD FEATURES

MEASUREMENTS

GS™-2046

- 26 ft (8.10 m) working height
- Up to 1,200 lb (545 kg) lift capacity

GS™-2646

- 32 ft (9.92 m) working height
- Up to 1,000 lb (454 kg) lift capacity

GS™-3246


- 38 ft (11.75 m) working height
- Up to 700 lb (318 kg) lift capacity

PRODUCTIVITY

- Proportional lift and drive
- On-board diagnostic system
- AC power to platform
- Platform swing gate
- Electric horn
- Tilt level sensor with audible alarm
- Descent alarm
- Hour meter
- Multiple disc brakes
- Manual platform lowering valve
- Pothole guards
- Solid non-marking tires
- Emergency stop at both platform and ground controls
- Drive speed interlock
- Folding rails with full-height swing gate
- Brake release
- Swing out component tray
- Lanyard attachment points

POWER

- Automatic battery charger

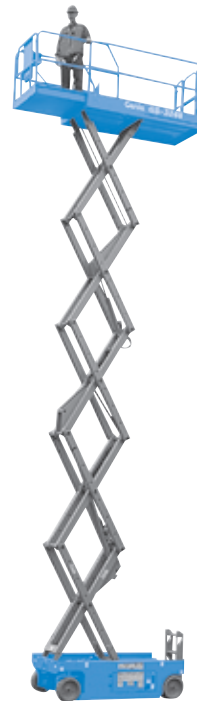

OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air line to platform
- Platform work lights
- Pipe cradle for square guardrails
- Dual flashing beacons
- Ground controls cover
- Motion alarm
- Automotive style horn

POWER

- Power inverter
- Maintenance-free batteries
- EE rating

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730

Telephone **(425) 881-1800**
Toll Free in USA/Canada **800-536-1800**
Fax (425) 883-3475

Genie Europe

The Maltings
Wharf Road
Grantham NG31 6BH
U.K.

Telephone **+44 (0)1476 584333**
Fax +44 (0)1476 584334

Email: infoeurope@genieind.com

Distributed By:

For further information, please contact your local distributor or the Genie Industries sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. Prices and specifications subject to change without notice. The only warranty applicable is the standard written warranty applicable to the particular product and sale. Genie makes no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of TEREX Corporation and/or its subsidiaries in the USA and other countries and all rights are reserved. Copyright © 2005 Genie Industries, Inc. "Genie" is a Registered Trademark of Genie Industries, Inc. in the USA and many other countries. Genie is a TEREX Company.